


Open Frame Switching Power Supply

SSF-0101A Single Output Series



www.seasonic.com

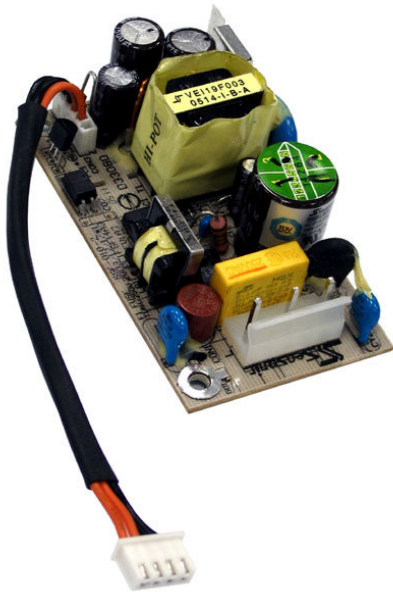

Applications:

- Networking
- Data communication
- Peripheral equipment
- Compact equipment

Features:

- Universal input
- Built-in Class B EMI filter
- Fully regulated output
- Over voltage protection
- Over power protection
- Short circuit protection
- Thermal protection
- Integral AC socket
- Low profile design

Output Specifications:

Model	Output power	Output Voltage	Maximum Current	Dimension(mm)
SSF-0101A-1	6.6W	3.3V	2A	L78 × W42 × H22.5
SSF-0101A-2	10W	5A	2A	
SSF-0101A-3	13W	3.3A	2A	
SSF-0101A-4	10W	2.5A	2A	

Dimension:

L78.0 × W42.0 × H22.5 mm
(L3.07 × W1.66 × H0.89inch)

Mating Connectors:

- AC input, DC output
- HF-301(SEASONIC)
- JST B2B-XH-A or equivalent

Sea Sonic Electronics Co., Ltd.
www.seasonic.com
sales@seasonic.com.tw
Tel: +886 2 2659 0338
Fax: +886 2 2659 0530

Seasonic Electronics Inc.
www.seasonicusa.com
usa@seasonic.com
Tel: +1 626 969 9966
Fax: +1 626 969 9986

Sea Sonic Europe B.V.
europe@seasonic.com
Tel: +31 (0)10-2262131
Fax: +31 (0)10-2519947

General Specifications:

- Input voltage range: 90~264 Vac
- Input frequency: 47~63 Hz
- Inrush current: 30A/60A max.
- Hold up time: 10 mS typical.
- Efficiency: 72~75% typical
- Leakage current: 1mA Maximum
- Line regulation: 1% typical
- Load regulation: 4% typical
- MTBF: 100K hours typical

Safety: CB, CUL, TUV, CCC

EMC: CE, FCC

Specification may change without prior notice

